

SIRIUS soft starter 200-480 V 47 A, 24 V AC/DC Screw terminals



<b>Product brand name</b>	SIRIUS
<b>Product category</b>	Hybrid switching devices
<b>Product designation</b>	Soft starter
<b>Manufacturer's article number</b>	<ul style="list-style-type: none"> <li>• of HMI-Modul high-feature usable <a href="#">3RW5980-0HF00</a></li> <li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li> <li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li> <li>• of communication module Modbus TCP usable <a href="#">3RW5980-0CT00</a></li> <li>• of circuit breaker usable at 400 V <a href="#">3RV2032-4JA10; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V <a href="#">3RV2032-4JA10; Type of coordination 1, Iq = 10 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3RV2032-4RA10; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V at inside-delta circuit <a href="#">3RV2032-4RA10; Type of coordination 1, Iq = 10 kA, CLASS 10</a></li> <li>• of the gG fuse usable up to 690 V <a href="#">3NA3824-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of the gG fuse usable at inside-delta circuit up to 500 V <a href="#">3NA3824-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE1021-2; Type of coordination 2, Iq = 65 kA</a></li> </ul>

- of back-up R fuse link for semiconductor protection usable up to 690 V

[3NE8024-1; Type of coordination 2, Iq = 65 kA](#)

### General technical data

<b>Starting voltage [%]</b>	20 ... 100 %
<b>Start-up ramp time of soft starter</b>	0 ... 360 s
<b>Stopping time of soft starter</b>	0 ... 360 s
<b>Start torque [%]</b>	10 ... 100 %
<b>Stopping torque [%]</b>	10 ... 100 %
<b>Torque limit [%]</b>	20 ... 200 %
<b>Current limiting value [%] adjustable</b>	125 ... 800 %
<b>Breakaway voltage [%] adjustable</b>	40 ... 100 %
<b>Breakaway time adjustable</b>	0 ... 2 s
<b>Number of parameter sets</b>	3
<b>Accuracy class acc. to IEC 61557-12</b>	5 %
<b>Product component</b>	
• HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
<b>Product feature integrated bypass contact system</b>	Yes
<b>Number of controlled phases</b>	3
<b>Trip class</b>	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
<b>Current unbalance limiting value [%]</b>	10 ... 60 %
<b>Ground-fault monitoring limiting value [%]</b>	10 ... 95 %
<b>Recovery time after overload trip adjustable</b>	60 ... 1 800 s
<b>Insulation voltage</b>	
• rated value	480 V
<b>Impulse voltage rated value</b>	6 kV
<b>Blocking voltage of the thyristor maximum</b>	1 400 V
<b>Service factor</b>	1.15
<b>Surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for safe isolation</b>	
• between main and auxiliary circuit	480 V
<b>Protection class IP</b>	IP00
<b>Reference code acc. to DIN EN 81346-2</b>	Q
<b>Product function</b>	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• breakaway pulse	Yes
• Adjustable current limitation	Yes
• creep speed in both directions of rotation	Yes
• pump ramp down	Yes
• DC braking	Yes
• motor heating	Yes

• slave pointer function	Yes
• trace function	Yes
• Intrinsic device protection	Yes
• motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
• Evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
• inside-delta circuit	Yes
• Auto-reset	Yes
• Manual RESET	Yes
• remote reset	Yes
• communication function	Yes
• operating measured value display	Yes
• event list	Yes
• error logbook	Yes
• via software parameterizable	Yes
• via software configurable	Yes
• PROFINergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules
• firmware update	Yes
• removable terminal for control circuit	Yes
• combined braking	Yes
• analog output	Yes; 4 ... 20 mA (default) / 0 ... 10 V
• programmable control input-/outputs	Yes
• condition monitoring	Yes
• automatic parameterisation	Yes
• application wizards	Yes
• alternative run-down	Yes
• emergency operation mode	Yes
• reversing operation	Yes
• soft starting at heavy starting conditions	Yes

## Power Electronics

<b>Operating current</b>	
• at 40 °C rated value	47 A
• at 50 °C rated value	41.6 A
• at 60 °C rated value	36.2 A
<b>Operating current at inside-delta circuit</b>	
• at 40 °C rated value	81.4 A
• at 50 °C rated value	72 A
• at 60 °C rated value	62.7 A
<b>Operating voltage</b>	

<ul style="list-style-type: none"> <li>• rated value</li> </ul>	200 ... 480 V
<ul style="list-style-type: none"> <li>• at inside-delta circuit rated value</li> </ul>	200 ... 480 V
<b>Relative negative tolerance of the operating voltage</b>	-15 %
<b>Relative positive tolerance of the operating voltage</b>	10 %
<b>Relative negative tolerance of the operating voltage at inside-delta circuit</b>	-15 %
<b>Relative positive tolerance of the operating voltage at inside-delta circuit</b>	10 %
<b>Operating power for three-phase motors</b>	
<ul style="list-style-type: none"> <li>• at 230 V at 40 °C rated value</li> </ul>	11 kW
<ul style="list-style-type: none"> <li>• at 230 V at inside-delta circuit at 40 °C rated value</li> </ul>	22 kW
<ul style="list-style-type: none"> <li>• at 400 V at 40 °C rated value</li> </ul>	22 kW
<ul style="list-style-type: none"> <li>• at 400 V at inside-delta circuit at 40 °C rated value</li> </ul>	45 kW
<b>Operating frequency 1 rated value</b>	50 Hz
<b>Operating frequency 2 rated value</b>	60 Hz
<b>Relative negative tolerance of the operating frequency</b>	-10 %
<b>Relative positive tolerance of the operating frequency</b>	10 %
<b>Adjustable motor current</b>	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	10 A
<ul style="list-style-type: none"> <li>• at inside-delta circuit minimum</li> </ul>	17.3 A
<b>Minimum load [%]</b>	10 %; Relative to set I <sub>e</sub>
<b>Power loss [W] for rated value of the current at AC</b>	
<ul style="list-style-type: none"> <li>• at 40 °C to power-up</li> </ul>	14 W
<ul style="list-style-type: none"> <li>• at 50 °C to power-up</li> </ul>	12 W
<ul style="list-style-type: none"> <li>• at 60 °C to power-up</li> </ul>	11 W

#### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	AC/DC
<b>Control supply voltage at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>	24 V
<ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>	24 V
<b>Relative negative tolerance of the control supply voltage at AC at 50 Hz</b>	-20 %
<b>Relative positive tolerance of the control supply voltage at AC at 50 Hz</b>	20 %
<b>Relative negative tolerance of the control supply voltage at AC at 60 Hz</b>	-20 %
<b>Relative positive tolerance of the control supply voltage at AC at 60 Hz</b>	20 %
<b>Control supply voltage frequency</b>	50 ... 60 Hz
<b>Relative negative tolerance of the control supply voltage frequency</b>	-10 %

Relative positive tolerance of the control supply voltage frequency	10 %
Control supply voltage <ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>	24 V
Relative negative tolerance of the control supply voltage at DC	-20 %
Relative positive tolerance of the control supply voltage at DC	20 %
Control supply current in standby mode rated value	440 mA
Holding current in the by-pass mode operating rated value	870 mA
Starting current at close of by-pass contact maximum	6.3 A
Inrush current peak at connect of control supply voltage maximum	7.5 A
Duration of inrush current peak at connect of control supply voltage	20 ms
Design of the overvoltage protection	Varistor
Design of short-circuit protection for control circuit	4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply

Inputs/ Outputs	
Number of digital inputs <ul style="list-style-type: none"> <li>• parameterizable</li> </ul>	4 4
Number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick
Number of digital outputs <ul style="list-style-type: none"> <li>• parameterizable</li> <li>• not parameterizable</li> </ul>	4 3 1
Digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
Number of analog outputs	1
Switching capacity current of the relay outputs <ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> <li>• at DC-13 at 24 V rated value</li> </ul>	3 A 1 A

Installation/ mounting/ dimensions	
Mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
Mounting type	screw fixing
Height	306 mm
Width	185 mm
Depth	203 mm
Required spacing with side-by-side mounting <ul style="list-style-type: none"> <li>• forwards</li> <li>• Backwards</li> <li>• upwards</li> </ul>	10 mm 0 mm 100 mm

<ul style="list-style-type: none"> <li>• downwards</li> <li>• at the side</li> </ul>	<p>75 mm</p> <p>5 mm</p>
<b>Installation altitude at height above sea level maximum</b>	5 000 m; Derating as of 1000 m, see catalog
<b>Weight without packaging</b>	5.5 kg

### Connections/Terminals

<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for control circuit</li> </ul>	<p>box terminal</p> <p>screw-type terminals</p>
<b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts for box terminal using the front clamping point solid</li> <li>• for main contacts for box terminal using the front clamping point finely stranded with core end processing</li> <li>• for main contacts for box terminal using the front clamping point stranded</li> <li>• at AWG conductors for main contacts for box terminal using the front clamping point</li> <li>• for main contacts for box terminal using the back clamping point solid</li> <li>• at AWG conductors for main contacts for box terminal using the back clamping point</li> <li>• for main contacts for box terminal using both clamping points solid</li> <li>• for main contacts for box terminal using both clamping points finely stranded with core end processing</li> <li>• for main contacts for box terminal using both clamping points stranded</li> <li>• for main contacts for box terminal using the back clamping point finely stranded with core end processing</li> <li>• for main contacts for box terminal using the back clamping point stranded</li> </ul>	<p>1x (2.5 ... 16 mm<sup>2</sup>)</p> <p>1x (2.5 ... 50 mm<sup>2</sup>)</p> <p>1x (10 ... 70 mm<sup>2</sup>)</p> <p>1x (10 ... 2/0)</p> <p>1x (2.5 ... 16 mm<sup>2</sup>)</p> <p>1x (10 ... 2/0)</p> <p>2x (2.5 ... 16 mm<sup>2</sup>)</p> <p>2x (2.5 ... 35 mm<sup>2</sup>)</p> <p>2x (6 ... 16 mm<sup>2</sup>), 2x (10 ... 50 mm<sup>2</sup>)</p> <p>1x (2.5 ... 50 mm<sup>2</sup>)</p> <p>1x (10 ... 70 mm<sup>2</sup>)</p>
<b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for control circuit solid</li> <li>• for control circuit finely stranded with core end processing</li> <li>• at AWG conductors for control circuit solid</li> </ul>	<p>1x (0.5 ... 4.0 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)</p> <p>1x (0.5 ... 2.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)</p> <p>1x (20 ... 12), 2x (20 ... 14)</p>
<b>Wire length</b> <ul style="list-style-type: none"> <li>• between soft starter and motor maximum</li> <li>• at the digital inputs at DC maximum</li> </ul>	<p>800 m</p> <p>1 000 m</p>

### Ambient conditions

<b>Ambient temperature</b> <ul style="list-style-type: none"> <li>during operation</li> <li>during storage and transport</li> </ul>	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above -25 ... +80 °C
<b>Environmental category</b> <ul style="list-style-type: none"> <li>during operation acc. to IEC 60721</li> <li>during storage acc. to IEC 60721</li> <li>during transport acc. to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
<b>Communication/ Protocol</b>	
<b>Communication module is supported</b> <ul style="list-style-type: none"> <li>PROFINET standard</li> <li>Modbus TCP</li> <li>PROFIBUS</li> </ul>	Yes Yes Yes
<b>UL/CSA ratings</b>	
<b>Manufacturer's article number</b> <ul style="list-style-type: none"> <li>of fuse at Standard Faults usable up to 575/600 V according to UL</li> <li>of fuse at Standard Faults usable at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class RK5 / K5, max. 175 A; Iq = 5 kA Type: Class RK5 / K5, max. 175 A; Iq = 5 kA
<b>Operating power [hp] for three-phase motors</b> <ul style="list-style-type: none"> <li>at 200/208 V at 50 °C rated value</li> <li>at 220/230 V at 50 °C rated value</li> <li>at 460/480 V at 50 °C rated value</li> <li>at 200/208 V at inside-delta circuit at 50 °C rated value</li> <li>at 220/230 V at inside-delta circuit at 50 °C rated value</li> <li>at 460/480 V at inside-delta circuit at 50 °C rated value</li> </ul>	10 hp 10 hp 30 hp 20 hp 25 hp 50 hp
<b>Contact rating of auxiliary contacts according to UL</b>	R300-B300

General Product Approval				Declaration of Conformity	Test Certificates
 CCC	 CSA	 UL		 EG-Konf.	<a href="#">Type Test Certificates/Test Report</a>

Marine / Shipping	other
-------------------	-------



[Confirmation](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5524-1HA04>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5524-1HA04>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5524-1HA04>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5524-1HA04&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5524-1HA04&lang=en)



**Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RW5524-1HA04/char>

**Characteristic: Installation altitude**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5524-1HA04&objecttype=14&gridview=view1>



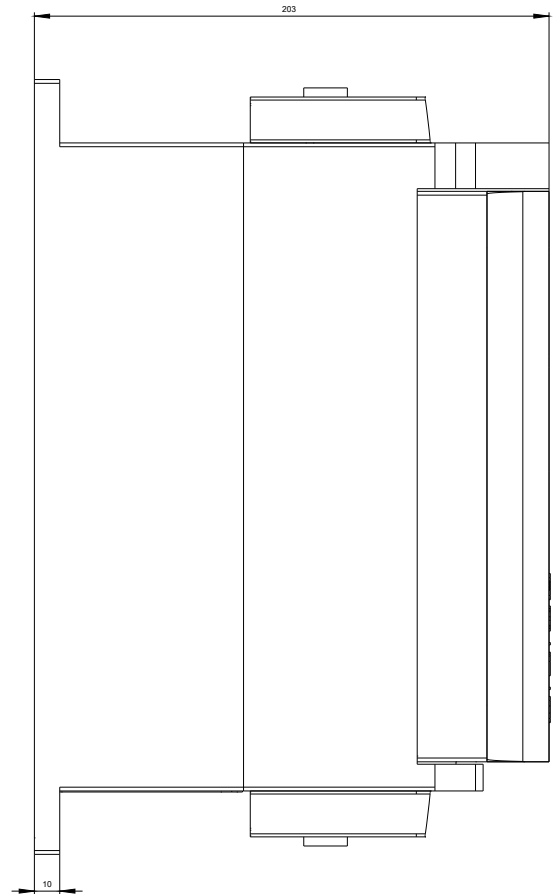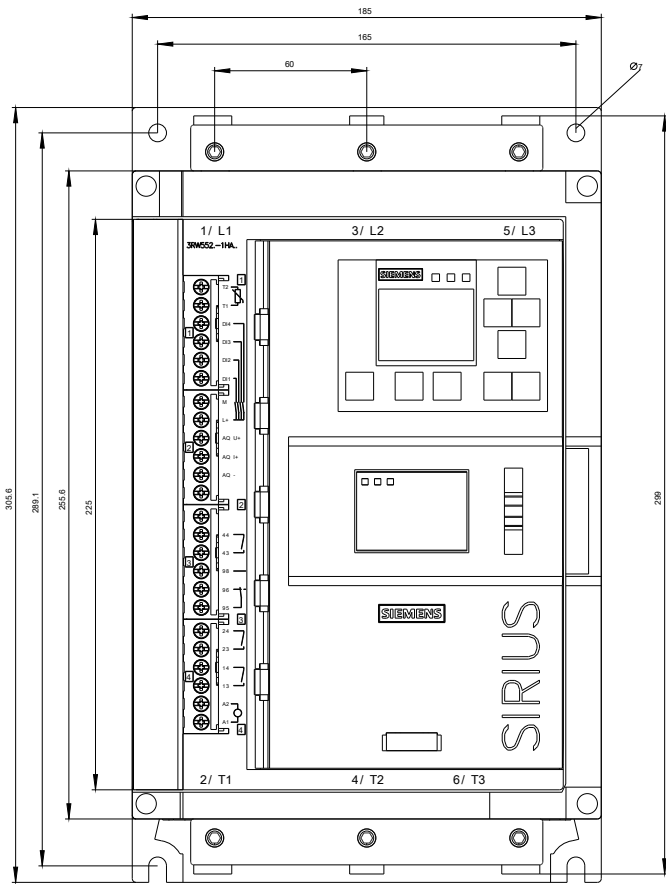

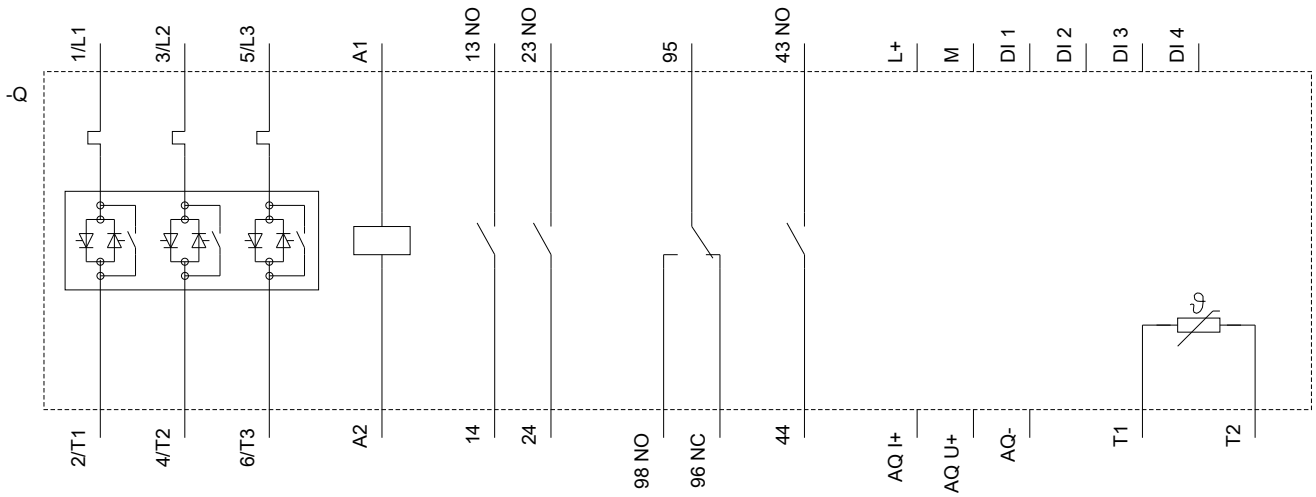

**last modified:**

03/20/2019