



CONTACT MODULE WITH 1 CONTACT ELEMENT, 1NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING

Figure similar

product brand name	SIRIUS ACT
Product designation	Commanding and signaling devices
Design of the product	Contact module

Contact block/ lampholder:

<b>Suitability for integration</b>	
• pressure selection button	Yes
• front element	Yes
• Pendant pushbutton	Yes
• Pendant switch	Yes

General technical data:

<b>Product function</b>	
• positive opening	No
<b>Insulation voltage</b>	
• Rated value	500 V
<b>Degree of pollution</b>	3
<b>Vibration resistance</b>	
• acc. to IEC 60068-2-6	10 ... 500 Hz: 5g
<b>Surge voltage resistance Rated value</b>	6 kV
<b>Operating frequency maximum</b>	3 600 1/h
<b>Mechanical service life (switching cycles)</b>	
• typical	10 000 000
<b>Electrical endurance (switching cycles)</b>	
• typical	10 000 000
<b>Thermal current</b>	10 A
<b>Protection class IP</b>	

<ul style="list-style-type: none"> <li>• of the enclosure</li> </ul>	IP40
<ul style="list-style-type: none"> <li>• of the terminal</li> </ul>	IP20
<b>Equipment marking</b>	
<ul style="list-style-type: none"> <li>• acc. to DIN EN 61346-2</li> </ul>	S
<ul style="list-style-type: none"> <li>• acc. to DIN EN 81346-2</li> </ul>	S
<b>Design of the fuse link for short-circuit protection of the auxiliary switch with type of assignment 1 required</b>	gG / Dz 10 A, quick-acting / Dz 10 A
<b>Continuous current of the C characteristic MCB</b>	10 A

#### Power Electronics:

<b>Contact reliability</b>	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)
----------------------------	--

#### Auxiliary circuit:

<b>Number of NC contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	0
<b>Number of NO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	1
<b>Number of CO contacts</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>	0
<b>Design of the contact of the auxiliary contacts</b>	Silver alloy
<b>Operating current at AC-12</b>	
<ul style="list-style-type: none"> <li>• at 24 V Rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>• at 48 V Rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>• at 110 V Rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>• at 230 V Rated value</li> </ul>	8 A
<ul style="list-style-type: none"> <li>• at 400 V Rated value</li> </ul>	8 A
<b>Operating current at AC-15</b>	
<ul style="list-style-type: none"> <li>• at 24 V Rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>• at 48 V Rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>• at 110 V Rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>• at 230 V Rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>• at 400 V Rated value</li> </ul>	3 A
<ul style="list-style-type: none"> <li>• at 500 V Rated value</li> </ul>	1.4 A
<b>Operating current at DC-12</b>	
<ul style="list-style-type: none"> <li>• at 24 V Rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>• at 48 V Rated value</li> </ul>	5 A
<ul style="list-style-type: none"> <li>• at 110 V Rated value</li> </ul>	2.5 A
<ul style="list-style-type: none"> <li>• at 230 V Rated value</li> </ul>	1 A
<ul style="list-style-type: none"> <li>• at 400 V Rated value</li> </ul>	0.3 A
<ul style="list-style-type: none"> <li>• at 500 V Rated value</li> </ul>	0.3 A
<b>Operating current at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V Rated value</li> </ul>	3 A

• at 48 V Rated value	1.5 A
• at 110 V Rated value	0.7 A
• at 230 V Rated value	0.3 A
• at 400 V Rated value	0.1 A
• at 500 V Rated value	0.1 A

#### Connections/ Terminals:

<b>Type of electrical connection</b>	screw-type terminals
<b>Type of connectable conductor cross-section</b>	
• solid with core end processing	2x (0.5 ... 0.75 mm <sup>2</sup> )
• solid without core end processing	2x (1.0 ... 1.5 mm <sup>2</sup> )
• finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> )
• finely stranded without core end processing	2x (1,0 ... 1,5 mm <sup>2</sup> )
• for AWG conductors	2x (18 ... 14)
<b>Tightening torque</b>	
• with screw-type terminals	0.8 ... 0.9 N·m

#### Ambient conditions:

<b>Ambient temperature</b>	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
<b>Environmental category during operation acc. to IEC 60721</b>	3K6, 3C3, 3S2, 3M6

#### Installation/ mounting/ dimensions:

<b>Mounting type</b>	
• of modules and accessories	Front plate mounting
<b>Height</b>	33.2 mm
<b>Width</b>	9.8 mm
<b>Depth</b>	27.7 mm

#### Certificates/ approvals:

**For use in hazardous locations**

[Manufacturer declaration](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**


<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU14001AA101BA0>

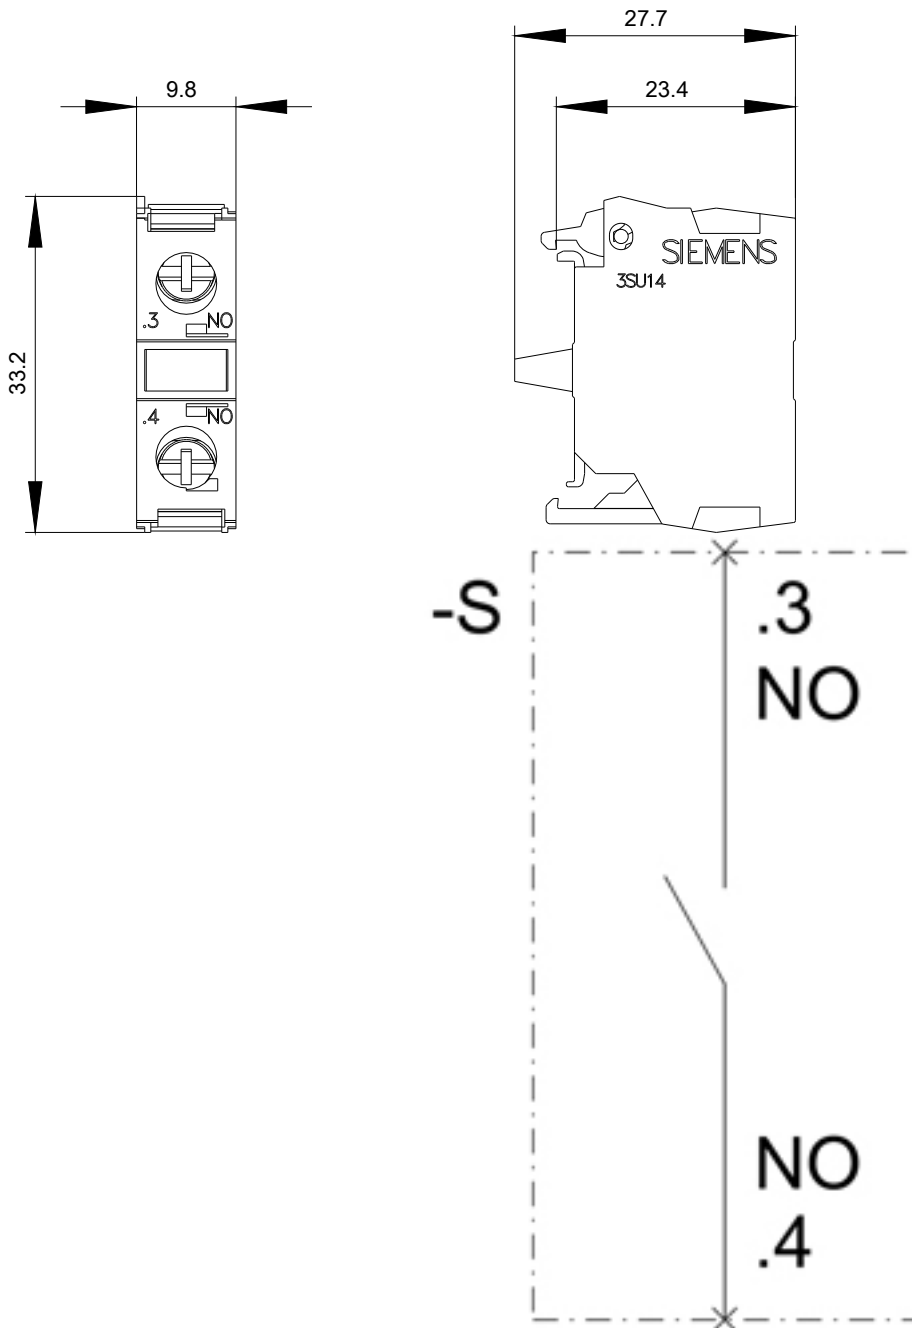

last modified:

01.06.2015