

CIRCUIT BREAKER 230/400V 10KA, 1-POLE, C, 25A, D=70MM



Figure similar

Model		
product brand name		SENTRON
Product designation		5SY miniature circuit breaker
Design of the product		5SY miniature circuit breakers
General technical data		
Number of poles		1
Number of poles / Note		1P
Tripping characteristic class		C
circuit-breaker / Design		5SY4
Mechanical service life (switching cycles) / typical		20 000
Overvoltage category		3
Voltage		
Type of voltage		AC/DC
Insulation voltage		
<ul style="list-style-type: none"> with single-phase operation / with AC / Rated value 	V	250
<ul style="list-style-type: none"> with multi-phase operation / with AC / Rated value 	V	440
Supply voltage		
Supply voltage / with AC / Rated value	V	400
Supply voltage frequency / Rated value	Hz	50
Protection class		
Protection class IP		IP20, with connected conductors
Energy limiting class		3

Switching capacity

Switching capacity current

• for DC / acc. to IEC 60947-2 / Rated value	kA	15
• acc. to EN 60898 / Rated value	kA	10
• acc. to IEC 60947-2 / Rated value	kA	20

Dissipation

Active power loss

• for rated value of the current / with AC / in hot operating state / per pole	W	2.2
--------------------------------------------------------------------------------	---	-----

Electricity

rated current I_n / IEC, DIN/VDE / at 40 Cel	A	23.5
Current / with AC / Rated value	A	25

Product details

Product feature / Touch protection		Yes
------------------------------------	--	-----

Product component

• combined terminal top	Yes
• combined terminal bottom	Yes

Product property

• Properties for main switches in accordance with EN 60204-1	Yes
• halogen-free	Yes
• sealable	Yes
• silicon-free	Yes

Product expansion / can be installed / supplementary devices	Yes
--------------------------------------------------------------	-----

Product function

Product function / neutral conductor switching	No
------------------------------------------------	----

Short circuit

Breaking capacity short-circuit current (I_{cn})

• with AC / acc. to UL 1077 and CSA C22.2 No.235	kA	5
• for DC / acc. to EN 60898-2	kA	10

Number

Number of test cycles / for environmental testing / acc. to IEC 60068-2-30	6
----------------------------------------------------------------------------	---

Connections

Connectable conductor cross-section / stranded

• minimum	mm ²	0.75
• maximum	mm ²	35

Connectable conductor cross-section

<ul style="list-style-type: none"> • solid <ul style="list-style-type: none"> — minimum — maximum • finely stranded / with core end processing <ul style="list-style-type: none"> — minimum — maximum 	mm ² mm ² mm ² mm ²	0.75 35 0.75 25
AWG number / as coded connectable conductor cross section		
<ul style="list-style-type: none"> • minimum • maximum 		14 4
Tightening torque [lbf·in] / with screw-type terminals		
<ul style="list-style-type: none"> • minimum • maximum 	lbf·in lbf·in	22 26
Tightening torque / with screw-type terminals		
<ul style="list-style-type: none"> • minimum • maximum 	N·m N·m	2.5 3
Position / of power supply cord		Any

Mechanical Design

Height	mm	90
Width	mm	18
Depth	mm	76
mounting position		any
Installation depth	mm	70
Number of width units		1
Mounting type		Quick assembly system
Net weight	g	162

Environmental conditions

Influence of the surrounding temperature		Max. 95% humidity
Shock resistance / acc. to IEC 60068-2-27		150m/s ² at 11ms half-sine
Vibration resistance / acc. to IEC 60068-2-6		50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec)
Ambient temperature		
<ul style="list-style-type: none"> • minimum • maximum • during storage / minimum • during storage / maximum 	°C °C °C °C	-25 55 -40 75

Certificates

Equipment marking / acc. to DIN EN 61346-2		F
--------------------------------------------	--	---

General Product Approval



CCC



IMQ



GOST



UL



VDE



General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	---------------------------	-------------------	-------------------

[KTL](#)



EG-Konf.

[other](#)

[Special Test Certificate](#)



BUREAU VERITAS



DNV

Shipping Approval	other
-------------------	-----------------------



GL



LRS



RINA

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SY41257>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SY41257/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5SY41257

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

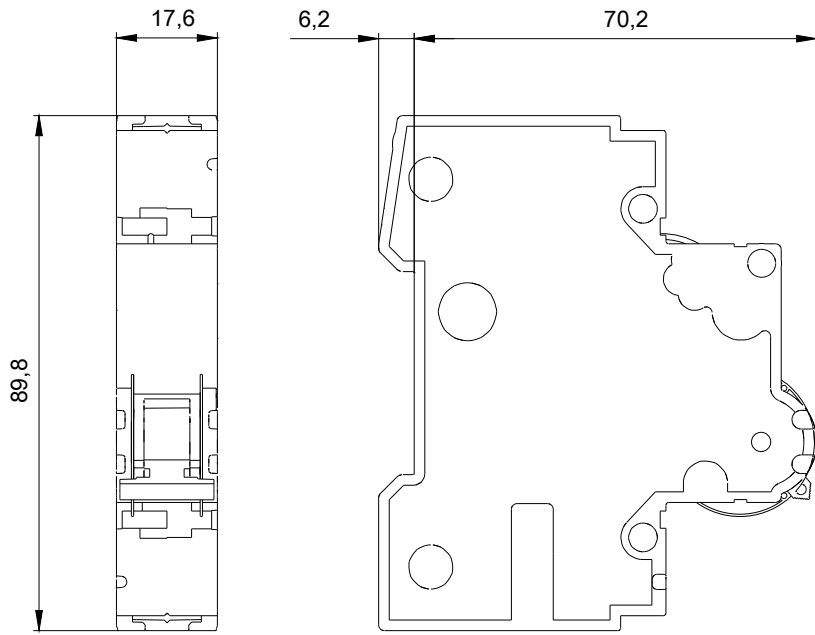

last modified:

04.05.2015