



Ordering data

6SL3210-1KE22-6AF1

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data

Input

Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz
Rated current (LO)	33.00 A
Rated current (HO)	24.10 A

Output

Number of phases	3 AC
Rated voltage	400 V
Rated power (LO)	11.00 kW
Rated power (HO)	7.50 kW
Rated current (IN)	24.10 A
Rated current (LO)	25.00 A
Rated current (HO)	16.50 A
Max. output current	33.00 A
Pulse frequency	4 kHz
Output frequency for vector control	0 ... 240 Hz
Output frequency for V/f control	0 ... 650 Hz

In firmware V4.7 and higher, due to legal requirements, the maximum output frequency is restricted to 550 Hz.

Overload capability

Low Overload (LO)

150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time

High Overload (HO)

200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time

General tech. specifications

Power factor λ	0.70 ... 0.85
Offset factor $\cos \phi$	0.95
Efficiency η	0.97
Sound pressure level (1m)	66 dB
Power loss	0.35 kW

Ambient conditions

Cooling Air cooling using an integrated fan

Cooling air requirement 0.018 m³/s

Installation altitude 1000 m

Ambient temperature

Operation -10 ... 40 °C (14 ... 104 °F)

Transport -40 ... 70 °C (-40 ... 158 °F)

Storage -40 ... 70 °C (-40 ... 158 °F)

Relative humidity

Max. operation 95 % At 40 °C (104 °F), condensation and icing not permissible

Closed-loop control techniques

V/f linear / square-law / parameterizable Yes

V/f with flux current control (FCC) Yes

V/f ECO linear / square-law Yes

Sensorless vector control Yes

Vector control, with sensor No

Encoderless torque control No

Torque control, with encoder No

Communication

Communication PROFINET



Ordering data

6SL3210-1KE22-6AF1

Mechanical data	
Degree of protection	IP20 / UL open type
Size	FSC
Net weight	4.40 kg
Width	140.0 mm
Height	295.0 mm
Depth	225.0 mm

Inputs/ outputs	
Standard digital inputs	
Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA
Fail-safe digital inputs	
Number	1
Digital outputs	
Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 1 A
Number as transistor	1
Output (resistive load)	DC 30 V, 1 A


Analog/ digital inputs	
Number	1 (Differential input)
Analog outputs	
Number	1 (Non-isolated output)
PTC/ KTY interface	
1 motor temperature sensor input, connectable PTC, KTY, and Thermo-Click sensors, accuracy $\pm 5^\circ\text{C}$	

Standards	
Compliance with standards	CE, cULus, c-tick
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Connections	
Signal cable	
Conductor cross-section	0.15 ... 1.50 mm ² (28 ... 16 AWG)
Line side	
Version	Plug-in screw-type terminals
Conductor cross-section	6.00 ... 16.00 mm ² (10 ... 5 AWG)
Motor end	
Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm ² (10 ... 5 AWG)
DC link (for braking resistor)	
Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm ² (10 ... 5 AWG)
PE connection	On housing with M4 screw

Max. motor cable length	
Shielded	50 m
Unshielded	100 m

Converter losses to EN 50598-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-69.91 %

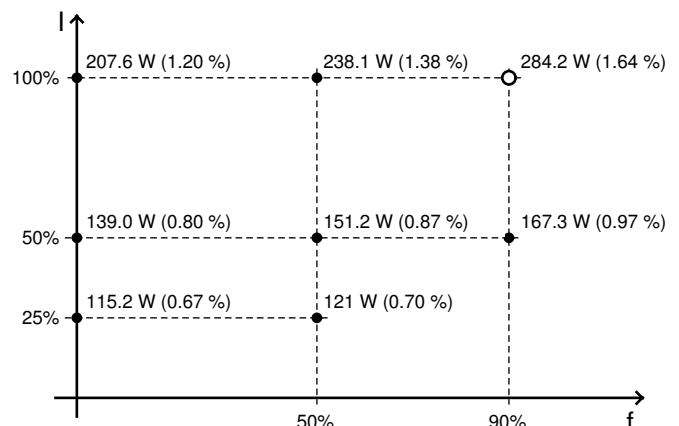

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard