


busbar mounted fuse holder, with LED (31959)

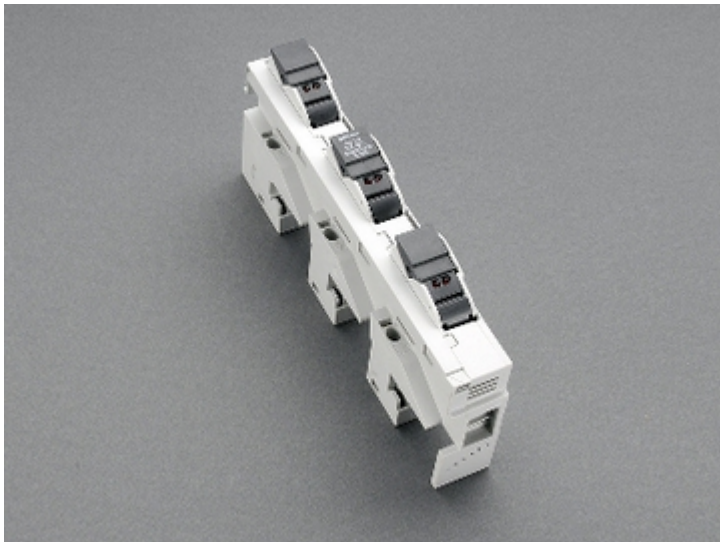

The picture may show a similar product.

Description

Part No.: 31959

AMBUS[®] 60Classic

busbar mounted fuse holder, with LED

for fuses Class CC UL 248-4, with LED 110 - 690 V AC / DC

Class CC / 3P

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

System

60Classic

Product group 01

Subgroup 47

pack size 4

EAN 4021267319595

catalog page 2020 : 3.21

eCl@ss 6.1 27142121
eCl@ss 7.1 27142121
ETIM 4.0 EC002705
ETIM 5.0 EC002705

Approvals

Standards

IEC 60269-1:2006 + A1:2009 + A2:2014
IEC 60269-2:2013 + A1:2016, Fuse system J
UL 4248-1

Approvals

CSA , UL , EAC



for UL feeder circuits >250V

type number: AELCC

EAC Type: AEL

UL file: E230163, UL category (for USA): IZLT <http://www.ul.com>

UL file: E230163, UL category (for Canada): IZLT7 <http://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>

Technical data

for fuse links size: Class CC

fuse links acc. to standard: UL 248-4

permitted power dissipation of the fuse-link: 3 W

Details IEC

Standards

IEC 60269-1:2006 + A1:2009 + A2:2014
IEC 60269-2:2013 + A1:2016, Fuse system J

Electrical data

short-circuit strength when protected by fuses: 200 kA

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 1.2 W.

(The power dissipation at full load would be 1.8 W.)

Details UL

Standards

UL 4248-1

for UL feeder circuits >250V

suitable for field-installed conductors

Electrical data UL

rated current (UL): 30 A

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 200 kA

Mechanical data

W x H x D: 27 x 200 x 104

weight: 18.8 kg/100

poles: 3-pole

for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars

Type of fastening: patented click mechanism

Terminal points

Not suitable for aluminium cables !

nach IEC: Cu 1.5 ... 6 mm² (f, re)

nach UL /CSA: AWG 16 ... AWG 10 (str)