


## busbar 40 x 10 (01 626)

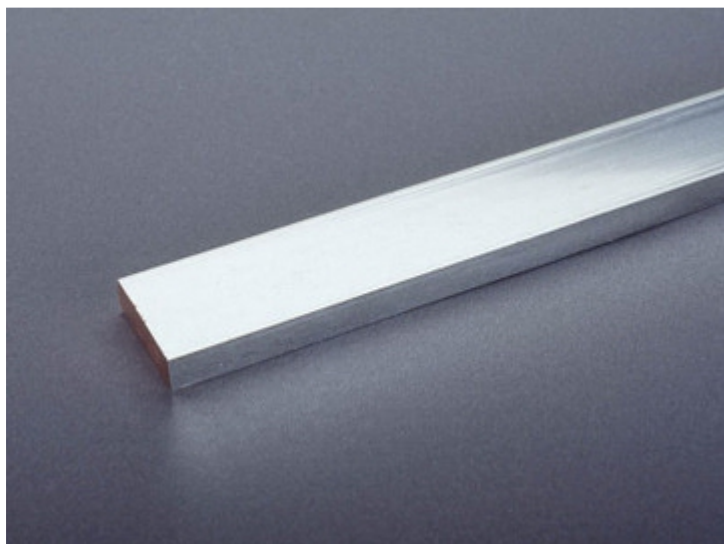

### Description

#### Article

Part No.: 01 626  
busbar 40 x 10  
length 2,40 m, tinned

#### System

100Energy  
185Power  
185mm-System

**Product group** 06

**Subgroup** 84

**pack size** 1

**EAN** 4021267016265

#### Advantages of the product

Tin-plated Cu busbars considerably reduce the effort of preparing the contact points.  
The Cu busbars are effectively protected against aggressive media.

Catalog page 2015 : 3/1, 4/1

eCl@ss 6.1 27370303

eCl@ss 7.1 27370303

ETIM 4.0 EC001522

ETIM 5.0 EC001522

## Approvals

### Standards

IEC 61439-1:2011

CCC approval: no certification required

## Product data

### Electrical data

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 54.8 W.  
(The power dissipation for operation with rated current would be 85.6 W.)

short-circuit withstandability: see product description of the used busbar support

### Mechanical data

L x W x D: 2400 x 40 x 10

Weight: 856.8 kg/100

cross-section: 400 mm<sup>2</sup>

Edge radius 0.5

### Material properties

Main body: Copper, tinned

corrosion-resistant, also in aggressive environments