


neutral conductor 160 A, disconnectable (03 668)

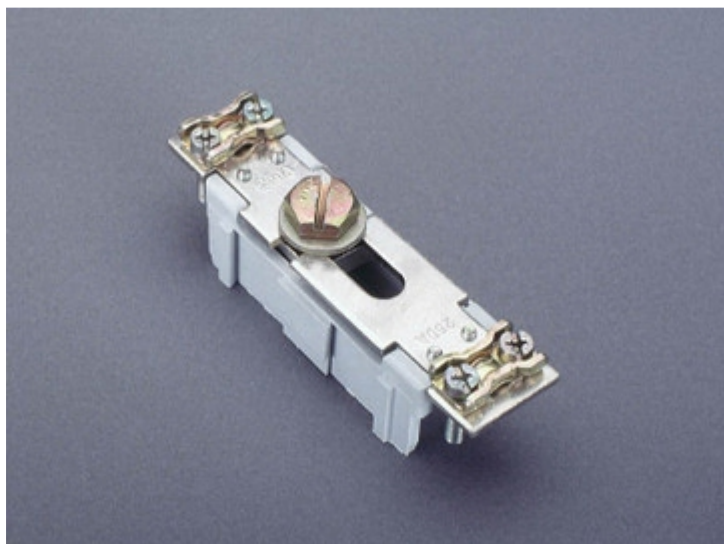

Description

Article

Part No.: 03 668

neutral conductor 160 A, disconnectable
clamp on both sides

System

Mounting plate

Product group 10

Subgroup 65

pack size 10

EAN 4021267036683

Catalog page 2015 : 6/14, 7/6

eCl@ss 6.1 27141120

eCl@ss 7.1 27141120

ETIM 4.0 EC002498

ETIM 5.0 EC002498

Approvals

Standards

IEC 61439-1:2011

CCC approval: no certification required

Product data

Electrical data

Rated current (IEC): 160 A

Rated voltage (IEC) AC: 690 V

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 1.9 W.

(The power dissipation for operation with rated current would be 2.9 W.)

max. permitted voltage (IEC) AC: 800 V

max. permitted voltage (IEC) DC: 800 V

Mechanical data

W x H x D: 35 x 120 x 28

Weight: 19.2 kg/100

Poles: 1-pole

Terminal points

clamp-type terminals :

1,5 - 70 mm²

flexible cables with wire-end ferrule,

stranded round cables,

la. Cu max. 12 mm wide, max. 10 mm thick

Md 3 Nm

(flexible cables of maximum cross-section may not fit when using wire-end ferrule)

Accessories