


Double-T section busbars 500mm² (01 609)

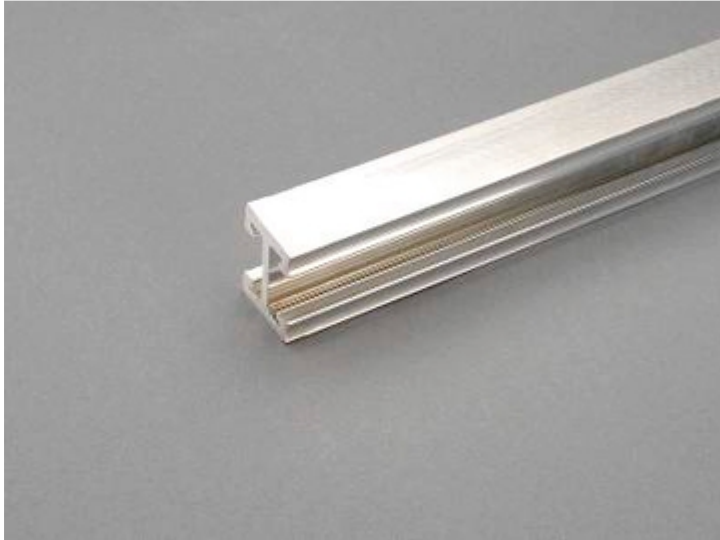

Description

Article

Part No.: 01 609
Double-T section busbars 500mm²
length 2,40 m, tinned

System

60Classic
185mm-System
centre feed unit

Product group 06

Subgroup 90

pack size 1

EAN 4021267016098

Advantages of the product

Tin-plated Cu busbars considerably reduce the effort of preparing the contact points.
The Cu busbars are effectively protected against aggressive media.

Catalog page 2015 : 2/4

eCl@ss 6.1 27370303
eCl@ss 7.1 27370303
ETIM 4.0 EC001522
ETIM 5.0 EC001522

Approvals

Standards

IEC 61439-1:2011

Approvals

CSA, UL, Germanischer Lloyd



for UL feeder circuits >250V

Type number: H500-L

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>
UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>
CSA file: 110285, CSA class: 3211-37 <http://directories.csa-international.org>
CCC approval: no certification required

Product data

Electrical data

Power dissipation:

The power dissipation at a typical load of 80% of the rated current results to 87.4 W.
(The power dissipation for operation with rated current would be 136.5 W.)

short-circuit withstandability: see product description of the used busbar support

Mechanical data

L x W x D: 2400 x 30 x 40
Weight: 1,062 kg/100
cross-section: 500 mm²

Edge radius 0.5

Material properties

Main body: Copper, tinned

corrosion-resistant, also in aggressive environments

Accessories



01 252
busbar cover
for double-T and triple-T section
1 m long